Features

- Serial Peripheral Interface (SPI) Compatible
- Supports SPI Modes 0 (0,0) and 3 (1,1)
- · Low-voltage and Standard-voltage Operation
 - $-5.0 (V_{CC} = 4.5V \text{ to } 5.5V)$
 - $-2.7 (V_{CC} = 2.7V \text{ to } 5.5V)$
 - $-1.8 (V_{CC} = 1.8V \text{ to } 3.6V)$
- 2.1 MHz Clock Rate
- 32-byte Page Mode
- Block Write Protection
 - Protect 1/4, 1/2, or Entire Array
- Write Protect (WP) Pin and Write Disable Instructions for Both Hardware and Software Data Protection
- Self-timed Write Cycle (5 ms Typical)
- · High-reliability
 - Endurance: 1 Million Write Cycles
 - Data Retention: 100 YearsESD Protection: >4000V
- Automotive Grade and Extended Temperature Devices Available
- 8-pin PDIP, JEDEC SOIC, and 14-pin and 20-pin TSSOP Packages


Description

The AT25080/160/320/640 provides 8192/16384/32768/65536 bits of serial electrically-erasable programmable read only memory (EEPROM) organized as 1024/2048/4096/8192 words of 8 bits each. The device is optimized for use in many industrial and commercial applications where low-power and low-voltage operation

(continued)

Pin Configuration

| Pin Name | Function |
|----------|-----------------------|
| CS | Chip Select |
| SCK | Serial Data Clock |
| SI | Serial Data Input |
| SO | Serial Data Output |
| GND | Ground |
| VCC | Power Supply |
| WP | Write Protect |
| HOLD | Suspends Serial Input |
| NC | No Connect |
| DC | Don't Connect |

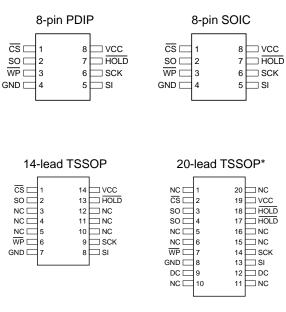

Note: *Pins 3, 4 and 17, 18 are internally connected for 14-lead TSSOP socket compatibility.



SPI Serial EEPROMs

8K (1024 x 8)

16K (2048 x 8)

32K (4096 x 8)

64K (8192 x 8)

AT25080 AT25160 AT25320 AT25640

Rev. 0675D-09/99





are essential. The AT25080/160/320/640 is available in space saving 8-pin PDIP, JEDEC SOIC, and 14-pin and 20-pin TSSOP packages.

The AT25080/160/320/640 is enabled through the Chip Select pin $\overline{(CS)}$ and accessed via a 3-wire interface consisting of Serial Data Input (SI), Serial Data Output (SO), and Serial Clock (SCK). All programming cycles are completely self-timed, and no separate ERASE cycle is required before WRITE.

BLOCK WRITE protection is enabled by programming the status register with one of four blocks of write protection. Separate program enable and program disable instructions are provided for additional data <u>protection</u>. Hardware data protection is provided via the WP pin to protect against inadvertent write attempts to the status register. The HOLD pin may be used to suspend any serial communication without resetting the serial sequence.


Absolute Maximum Ratings*

| Operating Temperature55°C to +125°C |
|--------------------------------------------------------|
| Storage Temperature65°C to +150°C |
| Voltage on Any Pin with Respect to Ground1.0V to +7.0V |
| Maximum Operating Voltage 6.25V |
| DC Output Current |

*NOTICE:

Stresses beyond those listed under "Absolute Maximum Ratings" may cause permanent damage to the device. This is a stress rating only and functional operation of the device at these or any other conditions beyond those indicated in the operational sections of this specification is not implied. Exposure to absolute maximum rating conditions for extended periods may affect device reliability.

Block Diagram

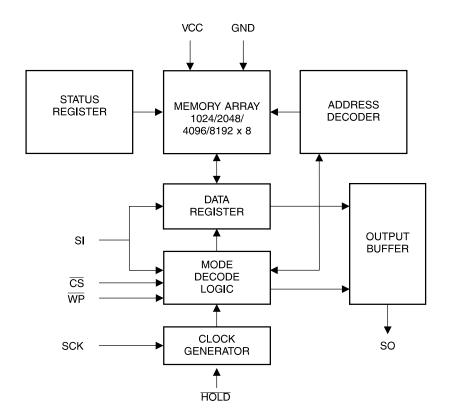

Pin Capacitance⁽¹⁾

Applicable over recommended operating range from $T_A = 25$ °C, f = 1.0 MHz, $V_{CC} = +5.0$ V (unless otherwise noted).

| Symbol | Test Conditions | Max | Units | Conditions |
|------------------|------------------------------------------|-----|-------|----------------|
| C _{OUT} | Output Capacitance (SO) | 8 | pF | $V_{OUT} = 0V$ |
| C _{IN} | Input Capacitance(CS, SCK, SI, WP, HOLD) | 6 | pF | $V_{IN} = 0V$ |

Note: 1. This parameter is characterized and is not 100% tested.

DC Characteristics

Applicable over recommended operating range from: T_{AI} = -40°C to +85°C, V_{CC} = +1.8V to +5.5V, T_{AC} = 0°C to +70°C, V_{CC} = +1.8V to +5.5V (unless otherwise noted).

| Symbol | Parameter | Test Condition | | Min | Тур | Max | Units |
|--------------------------------|---------------------|----------------------------------------------|-------------------------------------------------------------------------|-----------------------|-----|-----------------------|-------|
| V _{CC1} | Supply Voltage | | 1.8 | | 3.6 | V | |
| V _{CC2} | Supply Voltage | | | | | 5.5 | V |
| V _{CC3} | Supply Voltage | | | | | 5.5 | V |
| I _{CC1} | Supply Current | V _{CC} = 5.0V at 1 MHz, S | O = Open | | | 3.0 | mA |
| I _{CC2} | Supply Current | V _{CC} = 5.0V at 2 MHz, S | O = Open | | | 5.0 | mA |
| I _{SB1} | Standby Current | $V_{CC} = 1.8V, \overline{CS} = V_{CC}$ | $V_{CC} = 1.8V, \overline{CS} = V_{CC}$ | | | 0.1 | μA |
| I _{SB2} | Standby Current | $V_{CC} = 2.7V, \overline{CS} = V_{CC}$ | | 0.2 | 0.5 | μA | |
| I _{SB3} | Standby Current | $V_{CC} = 5.0V, \overline{CS} = V_{CC}$ | $V_{CC} = 5.0V, \overline{CS} = V_{CC}$ | | | 2.0 | μA |
| I _{IL} | Input Leakage | $V_{IN} = 0V \text{ to } V_{CC}$ | $V_{IN} = 0V \text{ to } V_{CC}$ | | | 3.0 | μA |
| I _{OL} | Output Leakage | $V_{IN} = 0V \text{ to } V_{CC}, T_{AC} = 0$ | V _{IN} = 0V to V _{CC} , T _{AC} = 0°C to 70°C | | | 3.0 | μA |
| V _{IL} ⁽¹⁾ | Input Low-voltage | | | -0.6 | | V _{CC} x 0.3 | V |
| V _{IH} ⁽¹⁾ | Input High-voltage | | | V _{CC} x 0.7 | | V _{CC} + 0.5 | V |
| V _{OL1} | Output Low-voltage | | I _{OL} = 3.0 mA | | | 0.4 | V |
| V _{OH1} | Output High-voltage | $4.5V \le V_{CC} \le 5.5V$ | I _{OH} = -1.6 mA | V _{CC} - 0.8 | | | V |
| V_{OL2} | Output Low-voltage | 4.014.11410.014 | I _{OL} = 0.15 mA | | | 0.2 | V |
| V_{OH2} | Output High-voltage | $1.8V \le V_{CC} \le 3.6V$ | I _{OH} = -100 μA | V _{CC} - 0.2 | | | V |

Note: 1. V_{IL} min and V_{IH} max are reference only and are not tested.





AC Characteristics

Applicable over recommended operating range from T_A = -40°C to +85°C, V_{CC} = As Specified, CL = 1 TTL Gate and 100 pF (unless otherwise noted).

| Symbol | Parameter | Voltage | Min | Max | Units |
|------------------|---------------------|-------------------------------------|--------------------|-------------------|-------|
| f _{sck} | SCK Clock Frequency | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 0 0 0 | 2.1 2.1 0.5 | MHz |
| t _{RI} | Input Rise Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | | 2 2 2 | μs |
| t _{FI} | Input Fall Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | | 2 2 2 | μs |
| t _{wh} | SCK High Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 200 200 800 | | ns |
| t _{wL} | SCK Low Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 200 200 800 | | ns |
| t _{cs} | CS High Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 250 250 1000 | | ns |
| t _{css} | CS Setup Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 250 250 1000 | | ns |
| t _{csh} | CS Hold Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 250 250 1000 | | ns |
| t _{su} | Data In Setup Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 50 50 100 | | ns |
| t _H | Data In Hold Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 50 50 100 | | ns |
| t _{HD} | Hold Setup Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 100 100 400 | | |
| t _{CD} | Hold Hold Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 200 200 400 | | ns |
| t _v | Output Valid | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 0 0 0 | 200 200 800 | ns |
| t _{HO} | Output Hold Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 0 0 0 | | ns |

AC Characteristics (Continued)

Applicable over recommended operating range from T_A = -40°C to +85°C, V_{CC} = As Specified, CL = 1 TTL Gate and 100 pF (unless otherwise noted).

| Symbol | Parameter | Voltage | Min | Max | Units |
|--------------------------|-----------------------|-------------------------------------|-------------|--------------------|--------------|
| t _{LZ} | Hold to Output Low Z | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | 0 0 0 | 100 100 100 | ns |
| t _{HZ} | Hold to Output High Z | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | | 100 100 100 | ns |
| t _{DIS} | Output Disable Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | | 250 250 1000 | ns |
| t _{WC} | Write Cycle Time | 4.5 - 5.5 2.7 - 5.5 1.8 - 3.6 | | 5 10 20 | ms |
| Endurance ⁽¹⁾ | 5.0V, 25°C, Page Mode | | 1M | | Write Cycles |

Note: 1. This parameter is characterized and is not 100% tested.





Serial Interface Description

MASTER: The device that generates the serial clock.

SLAVE: Because the Serial Clock pin (SCK) is always an input, the AT25080/160/320/640 always operates as a slave.

TRANSMITTER/RECEIVER: The AT25080/160/320/640 has separate pins designated for data transmission (SO) and reception (SI).

MSB: The Most Significant Bit (MSB) is the first bit transmitted and received.

SERIAL OP-CODE: After the device is selected with $\overline{\text{CS}}$ going low, the first byte will be received. This byte contains the op-code that defines the operations to be performed.


INVALID OP-CODE: If an invalid op-code is received, no data will be shifted into the AT25080/160/320/640, and the serial output pin (SO) will remain in a high impedance state until the falling edge of \overline{CS} is detected again. This will reinitialize the serial communication.

CHIP SELECT: The AT25080/160/320/640 is selected when the \overline{CS} pin is low. When the device is not selected, data will not be accepted via the SI pin, and the serial output pin (SO) will remain in a high impedance state.

HOLD: The HOLD pin is used in conjunction with the CS pin to select the AT25080/160/320/640. When the device is selected and a serial sequence is underway, HOLD can be used to pause the serial communication with the master device without resetting the serial sequence. To pause, the HOLD pin must be brought low while the SCK pin is low. To resume serial communication, the HOLD pin is brought high while the SCK pin is low (SCK may still toggle during HOLD). Inputs to the SI pin will be ignored while the SO pin is in the high impedance state.

WRITE PROTECT: The write protect pin (WP) will allow normal read/write operations when held high. When the WP pin is brought low and WPEN bit is "1", all write operations to the status register are inhibited. WP going low while CS is still low will interrupt a write to the status register. If the internal write cycle has already been initiated, WP going low will have no effect on any write operation to the status register. The WP pin function is blocked when the WPEN bit in the status register is "0". This will allow the user to install the AT25080/160/320/640 in a system with the WP pin tied to ground and still be able to write to the status register. All WP pin functions are enabled when the WPEN bit is set to "1".

SPI Serial Interface

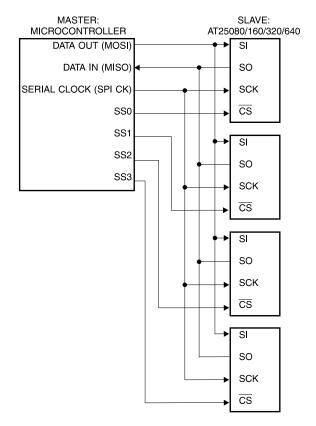

Functional Description

The AT25080/160/320/640 is designed to interface directly with the synchronous serial peripheral interface (SPI) of the 6805 and 68HC11 series of microcontrollers.

The AT25080/160/320/640 utilizes an 8-bit instruction register. The list of instructions and their operation codes are contained in Table 1. All instructions, addresses, and data are transferred with the MSB first and start with a high-to-low CS transition.

Table 1. Instruction Set for the AT25080/160/320/640

| Instruction Name | Instruction Format | Operation |
|---------------------|-----------------------|-----------------------------|
| WREN | 0000 X110 | Set Write Enable Latch |
| WRDI | 0000 X100 | Reset Write Enable Latch |
| RDSR | 0000 X101 | Read Status Register |
| WRSR | 0000 X001 | Write Status Register |
| READ | 0000 X011 | Read Data from Memory Array |
| WRITE | 0000 X010 | Write Data to Memory Array |

WRITE ENABLE (WREN): The device will power-up in the write disable state when V_{CC} is applied. All programming instructions must therefore be preceded by a Write Enable instruction.

WRITE DISABLE (WRDI): To protect the device against inadvertent writes, the Write Disable instruction disables all programming modes. The WRDI instruction is independent of the status of the WP pin.

READ STATUS REGISTER (RDSR): The Read Status Register instruction provides access to the status register. The READY/BUSY and Write Enable status of the device can be determined by the RDSR instruction. Similarly, the Block Write Protection bits indicate the extent of protection employed. These bits are set by using the WRSR instruction.

Table 2. Status Register Format

| Bit 7 | Bit 6 | Bit 5 | Bit 4 | Bit 3 | Bit 2 | Bit 1 | Bit 0 |
|-------|-------|-------|-------|-------|-------|-------|---------|
| WPEN | х | Х | Х | BP1 | BP0 | WEN | RD Y |

Table 3. Read Status Register Bit Definition

| Bit | Definition | | | | |
|----------------------|-----------------------------------------------------------------------------------------------------------------------|--|--|--|--|
| Bit 0 (RDY) | Bit $0 = 0$ (\overline{RDY}) indicates the device is READY. Bit $0 = 1$ indicates the write cycle is in progress. | | | | |
| Bit 1 (WEN) | Bit 1= 0 indicates the device is not WRITE ENABLED. Bit 1 = 1 indicates the device is WRITE ENABLED. | | | | |
| Bit 2 (BP0) | See Table 3. | | | | |
| Bit 3 (BP1) | See Table 3. | | | | |
| Bits 4 - 6 are 0s wl | Bits 4 - 6 are 0s when device is not in an internal write cycle. | | | | |
| Bit 7 (WPEN) | See Table 4. | | | | |
| Bits 0 - 7 are 1s du | uring an internal write cycle. | | | | |

WRITE STATUS REGISTER (WRSR): The WRSR instruction allows the user to select one of four levels of protection. The AT25080/160/320/640 is divided into four array segments. One quarter (1/4), one half (1/2), or all of the memory segments can be protected. Any of the data within any selected segment will therefore be READ only. The block write protection levels and corresponding status register control bits are shown in Table 4.

The three bits, BP0, BP1, and WPEN are nonvolatile cells that have the same properties and functions as the regular memory cells (e.g. WREN, t_{WC} , RDSR).

Table 4. Block Write Protect Bits

| | Status Register Bits | | Array Addresses Protected | | | |
|--------|----------------------------|-----|---------------------------|---------------|---------------|---------------|
| Level | BP1 | BP0 | AT25080 | AT25160 | AT25320 | AT25640 |
| 0 | 0 | 0 | None | None | None | None |
| 1(1/4) | 0 | 1 | 0300 -03FF | 0600 -07FF | 0C00 -0FFF | 1800 -1FFF |
| 2(1/2) | 1 | 0 | 0200 -03FF | 0400 -07FF | 0800 -0FFF | 1000 -1FFF |
| 3(All) | 1 | 1 | 0000 -03FF | 0000 -07FF | 0000 -0FFF | 0000 -1FFF |





The WRSR instruction also allows the user to enable or disable the write protect (WP) pin through the use of the Write Protect Enable (WPEN) bit. Hardware write protection is enabled when the WP pin is low and the WPEN bit is "1". Hardware write protection is disabled when either the WP pin is high or the WPEN bit is "0". When the device is hardware write protected, writes to the Status Register, including the Block Protect bits and the WPEN bit, and the block-protected sections in the memory array are disabled. Writes are only allowed to sections of the memory which are not block-protected.

NOTE: When the WPEN bit is hardware write protected, it cannot be changed back to "0", as long as the $\overline{\text{WP}}$ pin is held low.

Table 5. WPEN Operation

| WPEN | WP | WEN | Protected Blocks | Unprotected Blocks | Status Register |
|------|------|-----|---------------------|-----------------------|--------------------|
| 0 | Х | 0 | Protected | Protected | Protected |
| 0 | Х | 1 | Protected | Writable | Writable |
| 1 | Low | 0 | Protected | Protected | Protected |
| 1 | Low | 1 | Protected | Writable | Protected |
| Х | High | 0 | Protected | Protected | Protected |
| Х | High | 1 | Protected | Writable | Writable |

READ SEQUENCE (READ): Reading the AT25080/160/320/640 via the SO (Serial Output) pin requires the following sequence. After the $\overline{\text{CS}}$ line is pulled low to select a device, the READ op-code is transmitted via the SI line followed by the byte address to be read (A15 - A0, Refer to Table 6). Upon completion, any data on the SI line will be ignored. The data (D7 - D0) at the specified address is then shifted out onto the SO line. If only one byte is to be read, the $\overline{\text{CS}}$ line should be driven high after the data comes out. The READ sequence can be continued since the byte address is automatically incremented and data will continue to be shifted out. When the highest address is reached, the address counter will roll over to the lowest address allowing the entire memory to be read in one continuous READ cycle.

WRITE SEQUENCE (WRITE): In order to program the AT25080/160/320/640, two separate instructions must be executed. First, the device **must be write enabled** via the Write Enable (WREN) Instruction. Then a Write (WRITE) Instruction may be executed. Also, the address of the memory location(s) to be programmed must be outside the protected address field location selected by the Block Write Protection Level. During an internal write cycle, all commands will be ignored except the RDSR instruction.

A Write Instruction requires the following sequence. After the CS line is pulled low to select the device, the WRITE op-code is transmitted via the SI line followed by the byte address (A15 - A0) and the data (D7 - D0) to be programmed (Refer to Table 6). Programming will start after the CS pin is brought high. (The LOW-to-High transition of the CS pin must occur during the SCK low-time immediately after clocking in the D0 (LSB) data bit.

The READY/BUSY status of the device can be determined by initiating a READ STATUS REGISTER (RDSR) Instruction. If Bit 0 = 1, the WRITE cycle is still in progress. If Bit 0 = 0, the WRITE cycle has ended. Only the READ STATUS REGISTER instruction is enabled during the WRITE programming cycle.

The AT25080/160/320/640 is capable of a 32-byte PAGE WRITE operation. After each byte of data is received, the five low order address bits are internally incremented by one; the high order bits of the address will remain constant. If more than 32 bytes of data are transmitted, the address counter will roll over and the previously written data will be overwritten. The AT25080/160/320/640 is automatically returned to the write disable state at the completion of a WRITE cycle.


NOTE: If the device is not Write enabled (WREN), the device will ignore the <u>Write</u> instruction and will return to the standby state, when $\overline{\text{CS}}$ is brought high. A new $\overline{\text{CS}}$ falling edge is required to re-initiate the serial communication.

Table 6. Address Key


| Address | AT25080 | AT25160 | AT25320 | AT25640 |
|--------------------|-----------------------------------|-----------------------------------|-----------------------------------|-----------------------------------|
| A _N | A ₉ - A ₀ | A ₁₀ - A ₀ | A ₁₁ - A ₀ | A ₁₂ - A ₀ |
| Don't Care Bits | A ₁₅ - A ₁₀ | A ₁₅ - A ₁₁ | A ₁₅ - A ₁₂ | A ₁₅ - A ₁₃ |


Timing Diagrams

Synchronous Data Timing (for Mode 0)

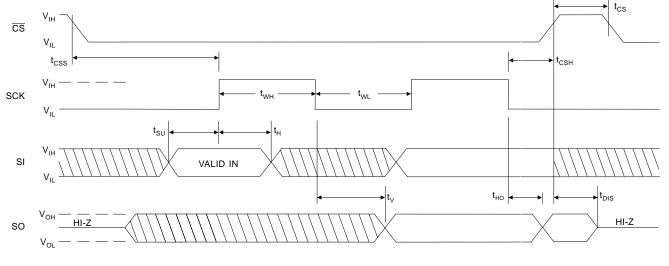

WREN Timing

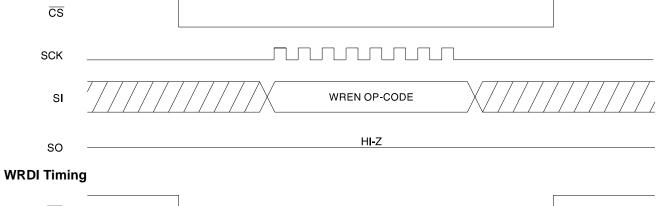


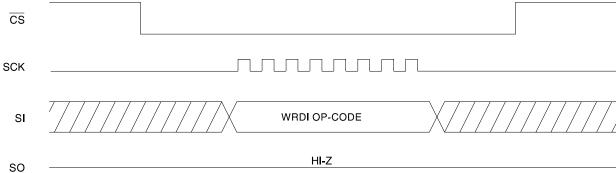







RDST Timing

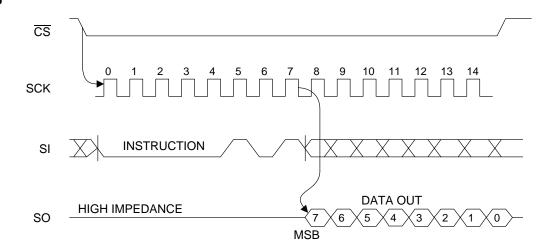


WRSR Timing

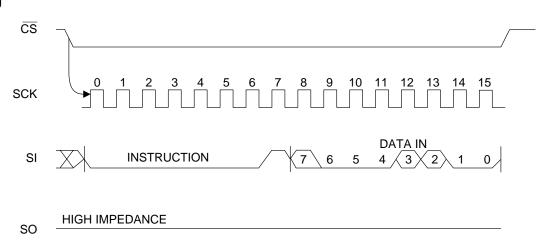

READ Timing

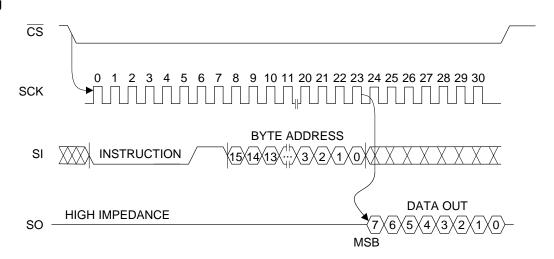


WRITE Timing





SO HIGH IMPEDANCE

HOLD Timing

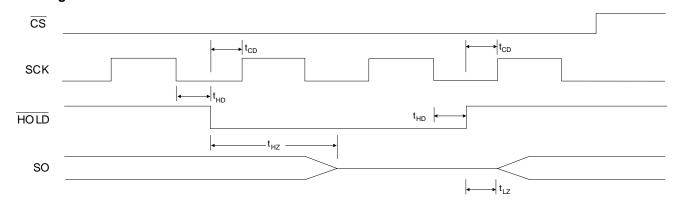





AT25080 Ordering Information

| t _{wc} (max) (ms) | l _{cc} (max) (μΑ) | I _{sв} (max) (μΑ) | f _{max} (kHz) | Ordering Code | Package | Operation Range |
|-------------------------------|-------------------------------|-------------------------------|---------------------------|--------------------|---------|-----------------|
| 5 | 5000 | 2.0 | 2100 | AT25080-10PC | 8P3 | Commercial |
| | | | | AT25080N-10SC | 8S1 | (0°C to 70°C) |
| | | | | AT25080T1-10TC | 14T | |
| | | | | AT25080T2-10TC | 20T | |
| 10 | 3000 | 0.5 | 2100 | AT25080-10PC-2.7 | 8P3 | Commercial |
| | | | | AT25080N-10SC-2.7 | 8S1 | (0°C to 70°C) |
| | | | | AT25080T1-10TC-2.7 | 14T | |
| | | | | AT25080T2-10TC-2.7 | 20T | |
| 20 | 3000 | 0.2 | 500 | AT25080-10PC-1.8 | 8P3 | Commercial |
| | | | | AT25080N-10SC-1.8 | 8S1 | (0°C to 70°C) |
| | | | | AT25080T1-10TC-1.8 | 14T | |
| | | | | AT25080T2-10TC-1.8 | 20T | |
| 5 | 5000 | 2.0 | 2100 | AT25080-10PI | 8P3 | Industrial |
| | | | | AT25080N-10SI | 8S1 | (-40°C to 85°C) |
| | | | | AT25080T1-10TI | 14T | |
| | | | | AT25080T2-10TI | 20T | |
| 10 | 3000 | 0.5 | 2100 | AT25080-10PI-2.7 | 8P3 | Industrial |
| | | | | AT25080N-10SI-2.7 | 8S1 | (-40°C to 85°C) |
| | | | | AT25080T1-10TI-2.7 | 14T | |
| | | | | AT25080T2-10TI-2.7 | 20T | |
| 20 | 3000 | 0.2 | 500 | AT25080-10PI-1.8 | 8P3 | Industrial |
| | | | | AT25080N-10SI-1.8 | 8S1 | (-40°C to 85°C) |
| | | | | AT25080T1-10TI-1.8 | 14T | |
| | | | | AT25080T2-10TI-1.8 | 20T | |

| Package Type | | | | | |
|--------------|-------------------------------------------------------------------|--|--|--|--|
| 8P3 | 8-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP) | | | | |
| 8 S 1 | 8-lead, 0.150" Wide, Plastic Gull Wing Small Outline (JEDEC SOIC) | | | | |
| 14T | 14-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) | | | | |
| 20T | 20-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) | | | | |
| | Options | | | | |
| Blank | Standard Device (4.5V to 5.5V) | | | | |
| -2.7 | Low-voltage (2.7V to 5.5V) | | | | |
| -1.8 | Low-voltage (1.8V to 3.6V) | | | | |

AT25160 Ordering Information

| t _{wc} (max) (ms) | I _{cc} (max) (μΑ) | I _{sв} (max) (μΑ) | f _{max} (kHz) | Ordering Code | Package | Operation Range |
|-------------------------------|-------------------------------|-------------------------------|---------------------------|--------------------|---------|-----------------|
| 5 | 5000 | 2.0 | 2100 | AT25160-10PC | 8P3 | Commercial |
| | | | | AT25160N-10SC | 8S1 | (0°C to 70°C) |
| | | | | AT25160T1-10TC | 14T | |
| | | | | AT25160T2-10TC | 20T | |
| 10 | 3000 | 0.5 | 2100 | AT25160-10PC-2.7 | 8P3 | Commercial |
| | | | | AT25160N-10SC-2.7 | 8S1 | (0°C to 70°C) |
| | | | | AT25160T1-10TC-2.7 | 14T | |
| | | | | AT25160T2-10TC-2.7 | 20T | |
| 20 | 3000 | 0.2 | 500 | AT25160-10PC-1.8 | 8P3 | Commercial |
| | | | | AT25160N-10SC-1.8 | 8S1 | (0°C to 70°C) |
| | | | | AT25160T1-10TC-1.8 | 14T | |
| | | | | AT25160T2-10TC-1.8 | 20T | |
| 5 | 5000 | 2.0 | 2100 | AT25160-10PI | 8P3 | Industrial |
| | | | | AT25160N-10SI | 8S1 | (-40°C to 85°C) |
| | | | | AT25160T1-10TI | 14T | |
| | | | | AT25160T2-10TI | 20T | |
| 10 | 3000 | 0.5 | 2100 | AT25160-10PI-2.7 | 8P3 | Industrial |
| | | | | AT25160N-10SI-2.7 | 8S1 | (-40°C to 85°C) |
| | | | | AT25160T1-10TI-2.7 | 14T | |
| | | | | AT25160T2-10TI-2.7 | 20T | |
| 20 | 3000 | 0.2 | 500 | AT25160-10PI-1.8 | 8P3 | Industrial |
| | | | | AT25160N-10SI-1.8 | 8S1 | (-40°C to 85°C) |
| | | | | AT25160T1-10TI-1.8 | 14T | |
| | | | | AT25160T2-10TI-1.8 | 20T | |

| Package Type | | | | | |
|--------------|-------------------------------------------------------------------|--|--|--|--|
| 8P3 | 8-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP) | | | | |
| 8S1 | 8-lead, 0.150" Wide, Plastic Gull Wing Small Outline (JEDEC SOIC) | | | | |
| 14T | 14-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) | | | | |
| 20T | 20-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) | | | | |
| | Options | | | | |
| Blank | Standard Device (4.5V to 5.5V) | | | | |
| -2.7 | Low-voltage (2.7V to 5.5V) | | | | |
| -1.8 | Low-voltage (1.8V to 3.6V) | | | | |





AT25320 Ordering Information

| t _{wc} (max) (ms) | I _{cc} (max) (μΑ) | I _{SB} (max) (μΑ) | f _{MAX} (kHz) | Ordering Code | Package | Operation Range |
|-------------------------------|-------------------------------|-------------------------------|---------------------------|--------------------|---------|-----------------|
| 5 | 5000 | 2.0 | 2100 | AT25320-10PC | 8P3 | Commercial |
| | | | | AT25320N-10SC | 8S1 | (0°C to 70°C) |
| | | | | AT25320T1-10TC | 14T | |
| | | | | AT25320T2-10TC | 20T | |
| 10 | 3000 | 0.5 | 2100 | AT25320-10PC-2.7 | 8P3 | Commercial |
| | | | | AT25320N-10SC-2.7 | 8S1 | (0°C to 70°C) |
| | | | | AT25320T1-10TC-2.7 | 14T | |
| | | | | AT25320T2-10TC-2.7 | 20T | |
| 20 | 3000 | 0.2 | 500 | AT25320-10PC-1.8 | 8P3 | Commercial |
| | | | | AT25320N-10SC-1.8 | 8S1 | (0°C to 70°C) |
| | | | | AT25320T1-10TC-1.8 | 14T | |
| | | | | AT25320T2-10TC-1.8 | 20T | |
| 5 | 5000 | 2.0 | 2100 | AT25320-10PI | 8P3 | Industrial |
| | | | | AT25320N-10SI | 8S1 | (-40°C to 85°C) |
| | | | | AT25320T1-10TI | 14T | |
| | | | | AT25320T2-10TI | 20T | |
| 10 | 3000 | 0.5 | 2100 | AT25320-10PI-2.7 | 8P3 | Industrial |
| | | | | AT25320N-10SI-2.7 | 8S | (-40°C to 85°C) |
| | | | | AT25320T1-10TI-2.7 | 14T | |
| | | | | AT25320T2-10TI-2.7 | 20T | |
| 20 | 3000 | 0.2 | 500 | AT25320-10PI-1.8 | 8P3 | Industrial |
| | | | | AT25320N-10SI-1.8 | 8S1 | (-40°C to 85°C) |
| | | | | AT25320T1-10TI-1.8 | 14T | |
| | | | | AT25320T2-10TI-1.8 | 20T | |

| Package Type | | | | |
|--------------|-------------------------------------------------------------------|--|--|--|
| 8P3 | 8-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP) | | | |
| 8S1 | 8-lead, 0.150" Wide, Plastic Gull Wing Small Outline (JEDEC SOIC) | | | |
| 14T | 14-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) | | | |
| 20T | 20-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) | | | |
| Options | | | | |
| Blank | Standard Device (4.5V to 5.5V) | | | |
| -2.7 | Low-voltage (2.7V to 5.5V) | | | |
| -1.8 | Low-voltage (1.8V to 3.6V) | | | |

AT25640 Ordering Information

| t _{wc} (max) (ms) | I _{cc} (max) (μΑ) | I _{sв} (max) (μΑ) | f _{max} (kHz) | Ordering Code | Package | Operation Range |
|-------------------------------|-------------------------------|-------------------------------|---------------------------|--------------------|---------|-----------------|
| 5 | 5000 | 2.0 | 2100 | AT25640-10PC | 8P3 | Commercial |
| | | | | AT25640N-10SC | 8S1 | (0°C to 70°C) |
| | | | | AT25640T1-10TC | 14T | |
| | | | | AT25640T2-10TC | 20T | |
| 10 | 3000 | 0.5 | 2100 | AT25640-10PC-2.7 | 8P3 | Commercial |
| | | | | AT25640N-10SC-2.7 | 8S1 | (0°C to 70°C) |
| | | | | AT25640T1-10TC-2.7 | 14T | |
| | | | | AT25640T2-10TC-2.7 | 20T | |
| 20 | 3000 | 0.2 | 500 | AT25640-10PC-1.8 | 8P3 | Commercial |
| | | | | AT25640N-10SC-1.8 | 8S1 | (0°C to 70°C) |
| | | | | AT25640T1-10TC-1.8 | 14T | |
| | | | | AT25640T2-10TC-1.8 | 20T | |
| 5 | 5000 | 2.0 | 2100 | AT25640-10PI | 8P3 | Industrial |
| | | | | AT25640N-10SI | 8S1 | (-40°C to 85°C) |
| | | | | AT25640T1-10TI | 14T | |
| | | | | AT25640T2-10TI | 20T | |
| 10 | 3000 | 0.5 | 2100 | AT25640-10PI-2.7 | 8P3 | Industrial |
| | | | | AT25640N-10SI-2.7 | 8S1 | (-40°C to 85°C) |
| | | | | AT25640T1-10TI-2.7 | 14T | |
| | | | | AT25640T2-10TI-2.7 | 20T | |
| 20 | 3000 | 0.2 | 500 | AT25640-10PI-1.8 | 8P3 | Industrial |
| | | | | AT25640N-10SI-1.8 | 8S1 | (-40°C to 85°C) |
| | | | | AT25640T1-10TI-1.8 | 14T | |
| | | | | AT25640T2-10TI-1.8 | 20T | |


| Package Type | | | | | |
|--------------|-------------------------------------------------------------------|--|--|--|--|
| 8P3 | 8-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP) | | | | |
| 8S1 | 8-lead, 0.150" Wide, Plastic Gull Wing Small Outline (JEDEC SOIC) | | | | |
| 14T | 14-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) | | | | |
| 20T | 20-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) | | | | |
| | Options | | | | |
| Blank | Standard Device (4.5V to 5.5V) | | | | |
| -2.7 | Low-voltage (2.7V to 5.5V) | | | | |
| -1.8 | Low-voltage (1.8V to 3.6V) | | | | |






Packaging Information


8P3, 8-lead, 0.300" Wide, Plastic Dual Inline Package (PDIP) Dimensions in Inches and (Millimeters) JEDEC STANDARD MS-001 BA

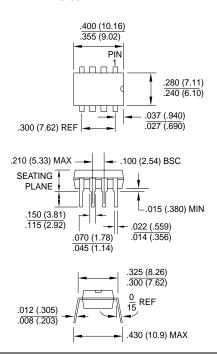


14T, 14-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) Dimensions in (Inches) and Millimeters*

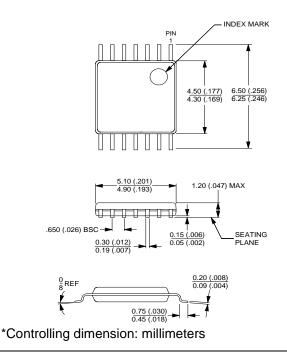

8S1, 8-lead, 0.150" Wide, Plastic Gull Wing Small Outline (JEDEC SOIC) Dimensions in Inches and (Millimeters)

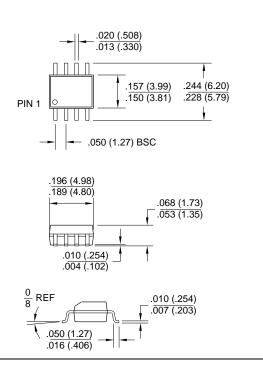

20T, 20-lead, 0.170" Wide, Thin Shrink Small Outline Package (TSSOP) Dimensions in (Inches) and Millimeters*

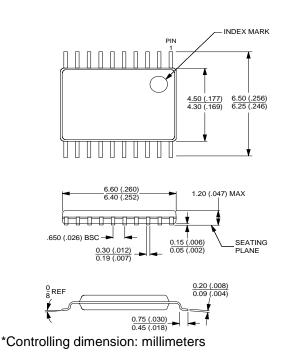



Atmel Headquarters

Corporate Headquarters

2325 Orchard Parkway San Jose, CA 95131 TEL (408) 441-0311 FAX (408) 487-2600

Europe

Atmel U.K., Ltd.
Coliseum Business Centre
Riverside Way
Camberley, Surrey GU15 3YL
England
TEL (44) 1276-686-677
FAX (44) 1276-686-697

Asia

Atmel Asia, Ltd. Room 1219 Chinachem Golden Plaza 77 Mody Road Tsimhatsui East Kowloon Hong Kong TEL (852) 2721-9778 FAX (852) 2722-1369

Japan

Ātmel Japan K.K. 9F, Tonetsu Shinkawa Bldg. 1-24-8 Shinkawa Chuo-ku, Tokyo 104-0033 Japan TEL (81) 3-3523-3551 FAX (81) 3-3523-7581

Atmel Operations

Atmel Colorado Springs

1150 E. Cheyenne Mtn. Blvd. Colorado Springs, CO 80906 TEL (719) 576-3300 FAX (719) 540-1759

Atmel Rousset

Zone Industrielle 13106 Rousset Cedex France TEL (33) 4-4253-6000 FAX (33) 4-4253-6001

Fax-on-Demand

North America: 1-(800) 292-8635 International: 1-(408) 441-0732

e-mail

literature@atmel.com

Web Site

http://www.atmel.com

BBS

1-(408) 436-4309

© Atmel Corporation 1999.

Atmel Corporation makes no warranty for the use of its products, other than those expressly contained in the Company's standard warranty which is detailed in Atmel's Terms and Conditions located on the Company's web site. The Company assumes no responsibility for any errors which may appear in this document, reserves the right to change devices or specifications detailed herein at any time without notice, and does not make any commitment to update the information contained herein. No licenses to patents or other intellectual property of Atmel are granted by the Company in connection with the sale of Atmel products, expressly or by implication. Atmel's products are not authorized for use as critical components in life support devices or systems.

Marks bearing $^{\text{\tiny{8}}}$ and/or $^{\text{\tiny{TM}}}$ are registered trademarks and trademarks of Atmel Corporation.

Printed on recycled paper.